


RAPID-SPAN CONTAINER MOUNTED STRUCTURES

Easy to relocate – perfect for both permanent and interim installations. Global Fabric Structures offers over 70 years experience in the design, manufacture and installation of pre-engineered, weatherproof structures for permanent or interim use.

Featuring high-quality UV resistant and waterproof fabrics, Rapid-Span structures are both durable and versatile. Engineered and manufactured using high quality materials in accordance with Australian standards, the Rapid Span Series can be designed to withstand wind conditions of up to 280km/hr.

BENEFITS INCLUDE

- Long-lasting duragal steel frame with painted welds where applicable
- Engineered for both permanent and interim applications
- Backed by industry leading 10 year warranties
- High re-sale value
- Fully dual directionally tensioned fabric for a drum tight finish
- Rapid, low-cost installations
- Large clear-span design
- Translucent fabric cladding option provides a well-lit, energy efficient, interior with reduced operating costs
- Poly tarp (PE) fabric cover to minimum 250gsm in various colours

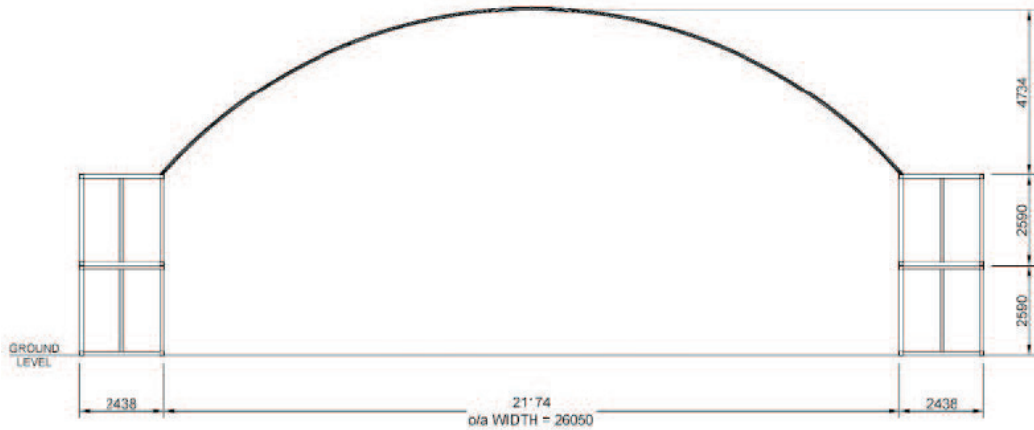

Rapid-Span structures are constructed as an arched roof fixed to shipping containers, steel columns, concrete walls or the side wall of existing structures.

ABBREVIATIONS

| | |
|------|--|
| RS | Rapid-Span |
| CM | Container Mounted (Inside Mounted) |
| DS | Double Stacked Containers (Most sizes available to suit Double Stacked Containers) |
| CMOM | Container Mounted - Outside Mounted |
| HC | Hi Cube Containers |
| CMLS | Container Mounted w/ Leg Supports (Outside Mounted) |
| T | Tall (Container Mounted w/Tall Leg Supports - outside mount) |

Length of structure is determined on the combination of shipping containers chosen

| Shipping container lengths (mm) | | Shipping container heights (mm) | |
|---------------------------------|-------|---------------------------------|------|
| Standard 20' | 6050 | Standard | 2590 |
| Standard 40' | 12190 | Hi Cube | 2890 |

RAPID-SPAN CONTAINER MOUNTED STRUCTURES SPECIFICATIONS

Frame

Duralgal steel frame components with painted welds where applicable

Mounting to Containers

- Site welded steel brackets
- Optional - weld-on top rails (to be welded to top of containers)
- Optional bolt-on top rails (bolt into container corner lugs)

Foundations

- Ballast weight specification for inside of containers
- Portable concrete ballast weights for container anchorage
- Concrete footing designs for containers

Accessories

- Partial end walls
- Full end walls
- Personnel doors
- Industrial doors (bi-fold/sliding/curtains/hangar)
- Joining strips (between 2x structures)
- Gutters and extended cover flaps for gutters
- Branding of covers
- Tarp repair kit

Fabric

Industrial grade polytarp fabric to minimum 250gsm

Fabric Colours

White, green, beige, blue, silver


Fabric Warranty

10 year diminishing warranty on structure

Engineering Standard

Engineered to AS/NZmin 140hm/h to 280kph
(Region A through Region D)

Rated for high importance and high level human usage

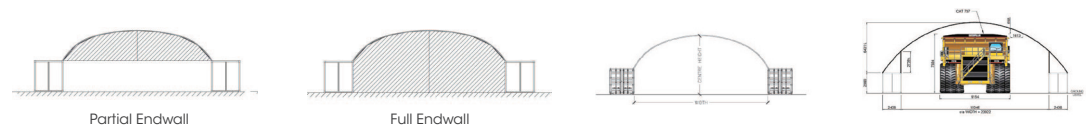

RAPID-SPAN DIMENSION REGISTER

| Product | Width | Length (m) | Distance between containers | Peak Height | Std Container Height | Product | Width | Length (m) | Distance between containers | Peak Height | Std Container Height |
|---------|-------|----------------|-----------------------------|-------------|----------------------|---------|-----------|----------------|-----------------------------|-------------|----------------------|
| RSCM | 6m | 12,18,24 etc | 6 | 4.89m | 2.59m | RSCM-LS | 20m | 12, 18, 24 etc | 15.00 | 6.61m | 2.59m |
| RSCM | 8m | 12,18,24 etc | 8.14 | 4.84m | 2.59m | RSCM-LS | 21m | 12, 18, 24 etc | 16.11 | 8.73m | 2.59m |
| RSCM | 10m | 12,18,24 etc | 9.92 | 6.1m | 2.59m | RSCM-LS | 22m | 12,18,24 etc | 17.39 | 7.88m | 2.59m |
| RSCM | 12m | 12,18,24 etc | 11.92 | 5.98m | 2.59m | RSCM-LS | 24m | 12, 18, 24 etc | 19.04 | 9.02m | 2.59m |
| RSCM | 16m | 12,18,24 etc | 15.8 | 5.91m | 2.59m | RSCM-LS | 26m | 12, 18, 24 etc | 21.05 | 10.81m | 2.59m |
| RSCM | 18m | 12,18,24 etc | 17.99 | 6.27m | 2.59m | RSCM-LS | 30m | 12, 18, 24 etc | 25.70 | 11.06m | 2.59m |
| RSCM | 21m | 12,18,24 etc | 21.17 | 7.36m | 2.59m | | | | | | |
| RSCM | 24m | 12, 18, 24 etc | 23.76 | 8.91m | 2.59m | | | | | | |
| RSCM-OM | 10m | 12,18,24 etc | 5.2 | 6.1m | 2.59m | RSCM-T | 18m | 12, 18, 24 etc | 13.20 | 11.57m | 2.59m |
| RSCM-OM | 12m | 12,18,24 etc | 7.2 | 5.98m | 2.59m | RSCM-T | 20m | 12, 18, 24 etc | 15.80 | 12.83m | 2.59m |
| RSCM-OM | 16m | 12,18,24 etc | 11.07 | 5.91m | 2.59m | RSCM-T | 24m (-9) | 12, 18, 24 etc | 19.22 | 11.64m | 2.59m |
| RSCM-OM | 18m | 12,18,24 etc | 13.3 | 6.27m | 2.59m | RSCM-T | 24m (-12) | 12, 18, 24 etc | 19.40 | 14.70m | 2.59m |
| RSCM-OM | 21m | 12,18,24 etc | 16.5 | 7.36m | 2.59m | RSCM-T | 28m (-10) | 12, 18, 24 etc | 23.26 | 12.29m | 2.59m |
| RSCM-OM | 24m | 12, 18, 24 etc | 19.02 | 8.91m | 2.59m | RSCM-T | 28m (-14) | 12, 18, 24 etc | 23.22 | 16.73m | 2.59m |
| | | | | | | RSCM-T | 30m | 12, 18, 24 etc | 25.18 | 15.05m | 2.59m |

*Custom sized Rapid-Spans are available upon request